



# MATRIX PEDESTALS™

PEDESTAL SUPPORT SYSTEM FOR PAVERS



## MATRIX PEDESTALS

### PAVER PEDESTAL

**6 13/16" x 6 13/16" x 9/16"**

**1/8" spacer tab 7/16" top tab**

Item Code: 684903

100 count



[Matrixpedestals.com](http://Matrixpedestals.com)

**MATRIX**  
PEDESTALS™




# TECHNICAL DATA SHEET

## REFERENCE 204731

MODEL: DGE204731  
UNIT WEIGHT: 0,1LB - 47G.

BOX  
WEIGHT: 26,45LB - 12KG  
UNITS: 260  
DIMENSIONS: 30,7X13X15,2IN  
780X330X386MM

PALLET P1,2  
BOX: 9 (2340 PCS)  
WEIGHT: 273,4LB - 124KG  
DIMENSIONS: 47,25x31,5x40,55in / 1200X800X1308mm

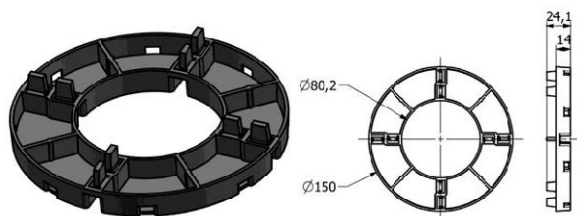

204731 roof tile for raised floors with 0,55in / 14 mm. Can be divided in four pieces in order to be applied in corner and edge lines details without any extra cost.

## TECHNICAL FEATURES

The products are produced from recycled (PP) materials.  
Product's height is 0,55in / 14mm.  
Outer-diameter is 150mm and inter-diameter is 80.2mm.  
Resistant to bad weather conditions, aging and most of chemical reaction.

## TEST RESULTS

| POSITION | HEIGHT (MM) | SLOPE | LOAD (kN) |
|----------|-------------|-------|-----------|
| 1/1      | 0,79        | 0%    | 58,25     |
| 1/2      | 0,79        | 0%    | 52,5      |
| 1/4      | 0,79        | 0%    | 45,25     |

1 KN = 101,KG  
1 KG / F = 2,20 LB / F

1/1: Load evenly applied across entirety of the load-bearing surface.

1/2: load applied to half of load-bearing surface.

1/4: load applied to one quarter of the load-bearing surface.

## APPLICATION

Pedestals allow to permanen height. Can support any type of ceramic or timber decking, stone, concrete paving or flag material, as well as fibreglass or metal grid panels.

Suitable for any kind of stable substrate, including applications directly over insulation panels.

| Covering size | M² / pcs. |
|---------------|-----------|
| 12 x 12 in    | 11,10     |
| 16 x 16 in    | 6,25      |
| 12 x 24 in    | 5,56      |
| 16 x 24 in    | 4,17      |
| 20 x 20 in    | 4,00      |
| 24 x 24 in    | 2,78      |

# TECHNICAL DATA SHEET




## REFERENCE 204748

MODEL: DGE204748  
UNIT WEIGHT: 0,32LB - 145G.

BOX  
WEIGHT: 46,3LB - 21KG.  
UNITS: 150  
DIMENSIONS: 30,7X13X15,2IN  
780X330X386MM

PALLET P1,2  
Box: 9 (1350 pcs)  
Weight: 467,4LB - 212Kg  
Dimensions: 47,25x31,5x40,55in  
1200x800x1308mm

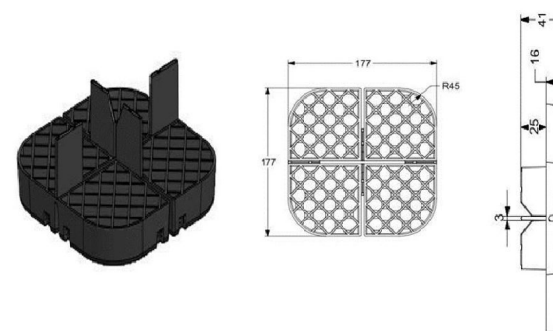

204748 roof tile for raised floors with 0,63in / 16 mm. Can be divided in four pieces in order to be applied in corner and edge lines details without any extra cost.

## TECHNICAL FEATURES

The products are produced from recycled (PP) materials.  
Product's height is a 0,63in / 16mm.  
Size 177mm x 177mm  
Resistant to bad weather conditions, aging and most of chemical reaction.

## TEST RESULTS

| POSITION | HEIGHT (MM) | SLOPE | LOAD (kN) |
|----------|-------------|-------|-----------|
| 1/1      | 1,2         | 0%    | 55,33     |
| 1/2      | 1,2         | 0%    | 49,87     |
| 1/4      | 1,2         | 0%    | 42,98     |

1 KN = 101,KG  
1 KG / F = 2,20 LB / F

1/4: load applied to one quarter of the load-bearing surface.

1/2: load applied to half of load-bearing surface.

1/1: Load evenly applied across entirety of the load-bearing surface.

## APPLICATION

Pedestals allow to permanen height. Can support any type of ceramic or timber decking, stone, concrete paving or flag material, as well as fibreglass or metal grid panels.

Suitable for any kind of stable substrate, including applications directly over insulation panels.

| Covering size | M² / pcs. |
|---------------|-----------|
| 12 x 12 in    | 11,10     |
| 16 x 16 in    | 6,25      |
| 12 x 24 in    | 5,56      |
| 16 x 24 in    | 4,17      |
| 20 x 20 in    | 4,00      |
| 24 x 24 in    | 2,78      |

# MATRIX™

## PEDESTALS

### AUTOLEVELLING



**MATRIX**  
AUTOLEVELLING HEAD  
CROSS 3 mm



**MATRIX**  
AUTOLEVELLING  
HEAD.



**MATRIX**  
AUTOLEVELLING HEAD FOR  
WOODEN BEAM HEAD  
HOLDER - 40-50 mm



**MATRIX**  
AUTOLEVELLING  
HEAD FOR WOODEN  
BEAM HEAD SIMPLE -  
up to 80 mm.

### GENERAL ACCESSORIES



**MATRIX**  
Straight spacer 3mm.  
(bag 40 units) Height  
16mm.



**MATRIX**  
Plus shape formed joint  
strips can be sit in the  
middle of pedestal and  
have 3mm thickness.  
Height 16mm.



**MATRIX**  
This type of carcass  
assembly equipment  
is put every point on  
pedestal except central  
point.



**MATRIX**  
X formed Carcass  
Assembly Equipment  
does sit on top and  
central of the pedestal.



**MATRIX**  
DAMPER TB-A  
(40 Units Bags)



**MATRIX**  
ADJUSTABLE HEIGHT  
COMPLEMENT.



**MATRIX**  
FIX COLLAR  
TB-CR.



**MATRIX**  
Slope Correctors, sit  
under bottom pedestal,  
avoids all impacts from  
drain slopes.

### OTHER ACCESSORIES



**TB-SP**  
WALL SPACER



**TB-MBF**  
METALLIC  
BOTTOM  
FRAME.



**TB-MTF**  
METALLIC TOP  
FRAME.



**TBR-AK**  
HEIGHT  
ADJUSTABLE KEY



**TB-PV**  
SCREW WIND  
PROTECTOR TB-  
PV (100 units  
Bag).

### Application

Adjustable pedestals Matrix allow to regulate accurate and permanent height. Can support any type of ceramic or timber decking, stone, concrete paving or flag material, as well as fiber glass or metal grid panels.

Suitable for any kind of stable substrate, including applications directly over insulation panels.

| Covering size | m <sup>2</sup> / pcs. |
|---------------|-----------------------|
| 30 x 30 cm    | 13,80                 |
| 40 x 40 cm    | 7,80                  |
| 30 x 60 cm    | 6,70                  |
| 40 x 60 cm    | 5,20                  |
| 50 x 50 cm    | 5,00                  |
| 60 x 60 cm    | 3,50                  |