

MATRIX PEDESTALS™

PEDESTAL SUPPORT SYSTEM FOR PAVERS



MATRIX PEDESTALS

8X ADJUSTABLE PEDESTAL

ADJUSTS FROM 5" – 8 7/8"

9/16" TOP TAB with 3/16" SPACER INCLUDED



Item Code: 604135

15 UNITS PER BOX



Matrixpedetsals.com

MATRIX
PEDESTALS™

MATRIX ADJUSTABLE

Model: 8X

Measures: 5"-8 7/8"

Unit weight: 548g

UNITS PER BOX: 15



Matrix pedestals for raised floors with adjustable height from 5"-8 7/8", provided of bi- component head. Pedestals are composed by a cylindrical base element of 195 mm diameter for resting on the laying surface, an intermediate screw with a locking security system.

Technical Features

The products are produced from recycled (PP) materials.


Height range is 5"-8 7/8".

This pedestal is comprised with base, head and slope and corrector.

Top-diameter 147mm, surface area 170 cm² and wall thick 5mm.

Bottom-diameter 195 mm, surface area 299 cm² and wall thick 5,5 mm.

Resistant to bad weather conditions, UV light, aging and most of chemical reaction.

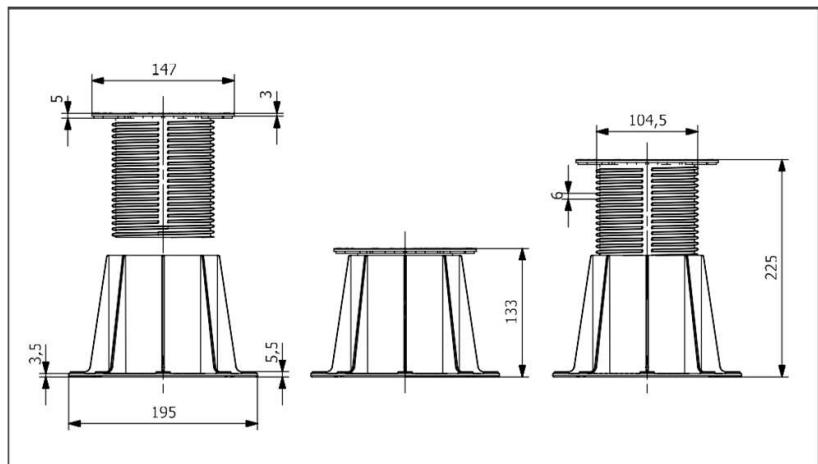


TEST RESULTS

Position	Height (mm)	Slope	Load (daN)
1/1	133	0%	1590
1/2	133	0%	1045
1/4	133	0%	605
1/1	225	5%	1395
1/2	225	5%	985
1/4	225	5%	715



1/1: Load evenly applied across
entirety of the load-bearing surface



1/2: load applied to half
of load-bearing surface.



1/4: load applied to one quarter
of the load-bearing surface.

1 daN = 1 kg / f = 2,23 lb / f

MATRIX

TM
PEDESTALS

AUTOLEVELLING



MATRIX
AUTOLEVELLING HEAD
CROSS 3 mm



MATRIX
AUTOLEVELLING
HEAD.



MATRIX
AUTOLEVELLING HEAD FOR
WOODEN BEAM HEAD
HOLDER - 40-50 mm



MATRIX
AUTOLEVELLING
HEAD FOR WOODEN
BEAM HEAD SIMPLE -
up to 80 mm.



MATRIX
Straight spacer 3mm.
(bag 40 units) Height
16mm.



MATRIX
Plus shape formed joint
strips can be sit in the
middle of pedestal and
have 3mm thickness.
Height 16mm.



MATRIX
This type of carcass
assembly equipment
is put every point on
pedestal except central
point.



MATRIX
X formed Carcass
Assembly Equipment
does sit on top and
central of the pedestal.



MATRIX
DAMPER TB-A
(40 Units Bags)



MATRIX
ADJUSTABLE HEIGHT
COMPLEMENT.



MATRIX
FIX COLLAR
TB-CR.



MATRIX
Slope Correctors, sit
under bottom pedestal,
avoids all impacts from
drain slopes.

OTHER ACCESSORIES



TB-SP
WALL SPACER



TB-MBF
METALLIC
BOTTOM
FRAME.



TB-MTF
METALLIC TOP
FRAME.



TBR-AK
HEIGHT
ADJUSTABLE KEY



TB-PV
SCREW WIND
PROTECTOR TB-
PV (100 units
Bag).

Application

Adjustable pedestals Matrix allow to regulate accurate and permanent height. Can support any type of ceramic or timber decking, stone, concrete paving or flag material, as well as fiber glass or metal grid panels.

Suitable for any kind of stable substrate, including applications directly over insulation panels.

Covering size	m ² / pcs.
30 x 30 cm	13,80
40 x 40 cm	7,80
30 x 60 cm	6,70
40 x 60 cm	5,20
50 x 50 cm	5,00
60 x 60 cm	3,50